ADVENTYS

Intertek UL197 CSA 22.2

Intertek NSF-4

KITCHEN-IN-A-BOX


THE OCTOPUS

INDUCTION COOKERS FOR PROFESSIONALS


High energy efficiency (90%+)

- ❏ Stainless steel casing
- ❏ Countertop installation
- ❏ Easy-to-clean capacitive touch controls
- ❏ Superior air flow and cooling
- ❏ Fans permit all day use
- ❏ Two (2) 1500 watt zones with precision controls
- ❏ Automatic pan detection/power supply monitor
- ❏ Empty pan security/automatic overheating protection
- ❏ Removable grease filter cleans air intake
- ❏ Accessory storage compartment



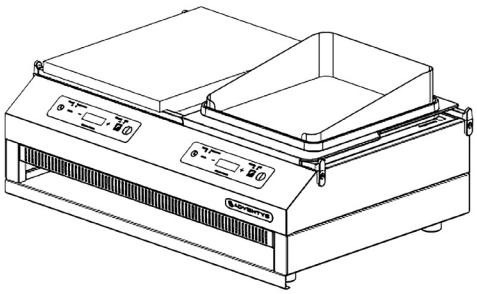

The OCTOPUS 208/240 V

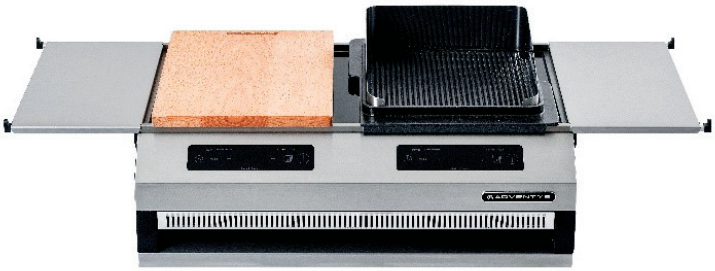



Removable Air Filter

INCLUDED:

- Removable cutting board
- Removable enameled cast iron grooved griddle plate
- Removable splash guard and night cover
- Two (2) 7” wide side shelves with pullout rails

OPTIONAL:

- 1/3, (2) 1/6 or (3) GN size pans for pullout rails
- Enameled cast iron flat plancha griddle



Precision Controls and Accessory Storage Compartment

EQUIPEX


100 NIANTIC AVENUE; SUITE 104 PROVIDENCE, RI 02907
TEL: (401)273-3300 FAX: (401) 273-3328 E-mail: sales@equipex.com
www.equipex.com

ADVENTYS


Intertek
UL197
CSA 22.2


Intertek
NSF-4

KITCHEN-IN-A-BOX
THE OCTOPUS

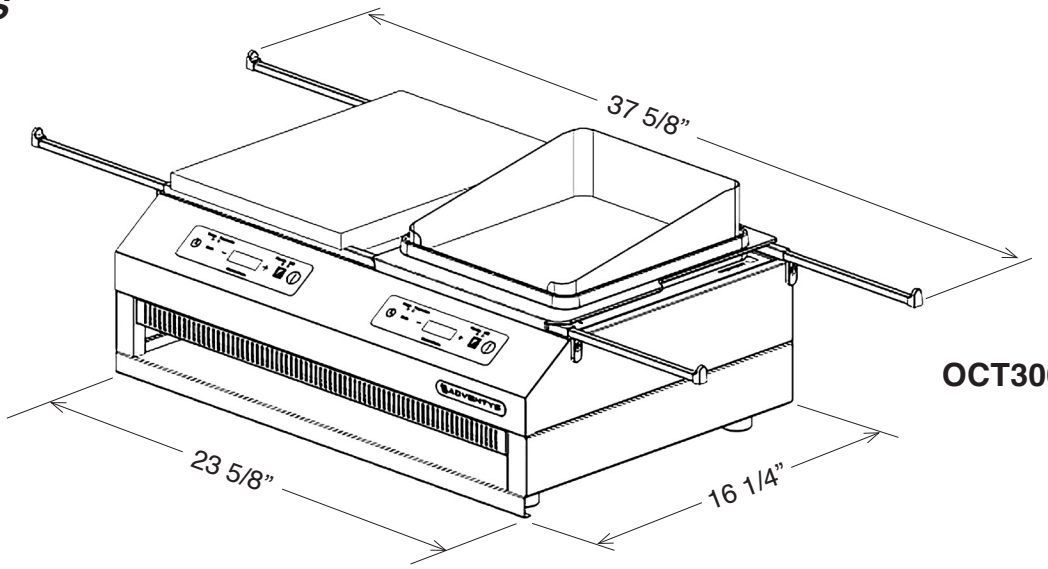

OCT3000

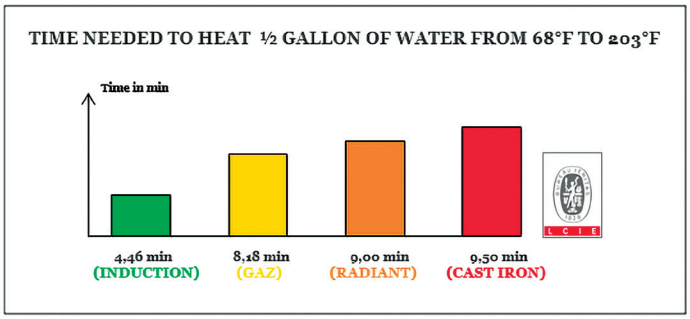

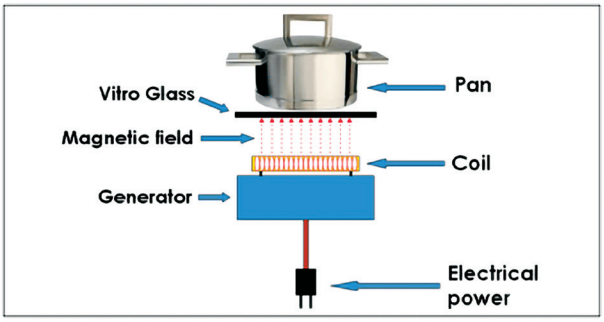

INDUCTION TECHNOLOGY

How does it work? Induction is a basic principal of physics. When the electric current goes through a copper coil it creates a magnetic field. The pan attracts the magnetic field and creates heat. Induction technology is over **90% efficient**, therefore there is no waste of power of heat. As soon as the pan is removed , the induction unit turns off and **saves you energy**.

SPECIFICATIONS

CLEARANCE: 2 1/2” EACH SIDE AND REAR MAXIMUM AMBIENT TEMPERATURE: 130F
NOTE: REQUIRES THE USE OF INDUCTION READY COOKWARE

MODEL	ELECTRICAL	EXTERIOR DIMENSIONS	WORK SURFACE DIMENSIONS	SHIPPING WEIGHT	NEMA PLUG
OCT3000	208/240V, 1PH 3.0KW, 13/15 Amps	23⅝”W x 16¼”D x 8⅝”H ---------- ADD 7” EACH SIDE FOR SIDE SHELVES	11¾”W x 14¾”D	105 lbs	6 - 20P

***All equipment must be plugged into a dedicated circuit of the proper ratings.**

WARRANTY: Limited two-year parts and labor

EQUIPEX
100 NIANTIC AVENUE; SUITE 104 PROVIDENCE, RI 02907
TEL: (401)273-3300 FAX: (401) 273-3328 E-mail: sales@equipex.com
www.equipex.com