


SPEC SHEET

PCWF8X26-36R-RM (Cooler With Floor)

Walk-In Cooler

EXTERIOR W x L x H	INTERIOR W x L x H	FLOOR · VOLUME	INSULATION	DOORS
8'-2" x 26'-3" x 7'-7"	7'-7" x 25'-7" x 6'-11"	193 sq ft · 1,337 cu ft	4" PU, R28 / R33	36"x77" RH

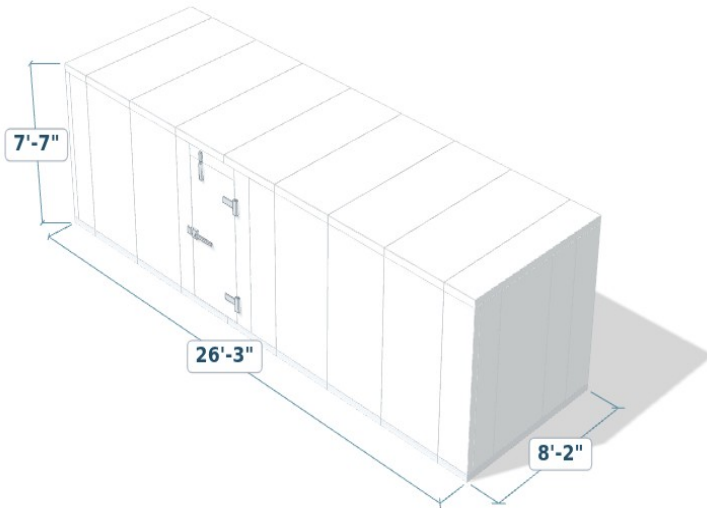

GENERAL SPECIFICATIONS

PANELS: 4" thick foamed-in-place polyurethane insulation, cam-lock panels, tongue & groove design, aluminum finish, CFC and HFC free materials, 10 year panel warranty and 1 year parts warranty.


FLOOR: Diamond plate floor, suitable for hand-truck and pallet jack operation.

DOOR: 36"x77", right hinged. Self-closing, spring loaded hinge, flush-mounted, keyed locking door handle, 120V/1P/1A heater wire, 120V vapor proof light fixture provided loose (bulb not included).

REFRIGERATION: Remote refrigeration system (-RM): evaporator coil hung under the ceiling inside the box, condensing unit installed remotely: 2 coils in the cooler. Coils blow down the length of each room from the end walls, toward the door where possible, never over or next to a door (one coil up to 18 ft, two up to 30 ft, three up to 40 ft). Estimated load: 14,900 BTU/h at 35°F (box 14,860). Based on Heatcraft quick calculations (95°F ambient, typical load); final sizing to be confirmed by the refrigeration supplier.

APPROVALS: NSF/ANSI 7 Commercial Refrigerators and Freezers, UL723 Flame Spread and Smoke Development (Flame Spread Index 5, Smoke Developed Index 300), Department of Energy (DOE) Compliance and Certified, ASTM Test 518, ASTM Test E84.



LAYOUT

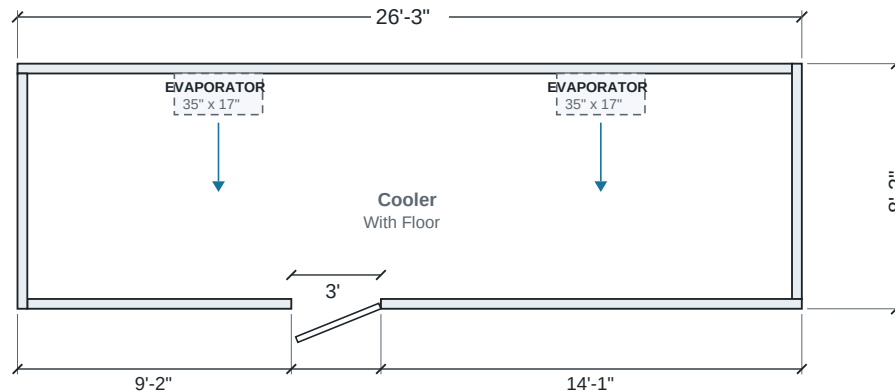

DOOR DETAIL · SIDE SECTION

Door: 36" x 77", Right Hinge

Side Section (Clear Height)



CUSTOMER APPROVAL

Name: _____

Signature: _____

Date: _____