# T&S BRASS AND BRONZE WORKS, INC.

**2 Saddleback Cove / P.O. Box 1088**
**Travelers Rest, SC 29690**

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com


Model No.

**B-2278-A12CRCEL**

Item No.

This Space for Architect/Engineer Approval


Job Name_____Date_____


Model Specified_____ Quantity_____

Customer/Wholesaler_____

Contractor_____

Architect/Engineer_____

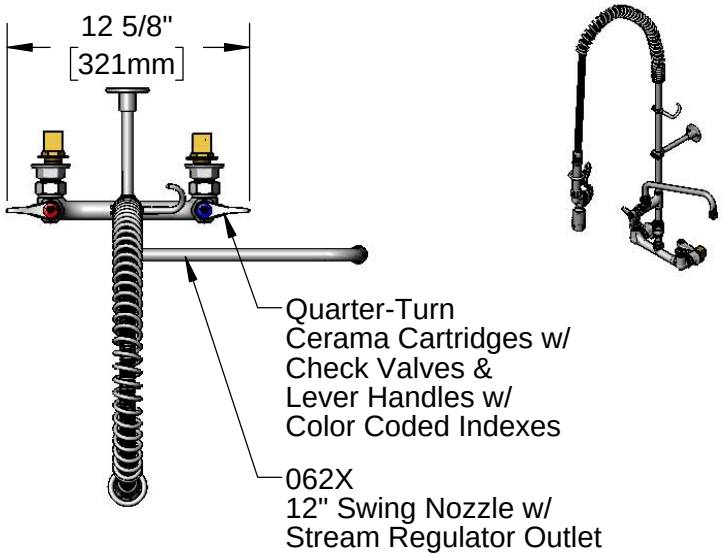

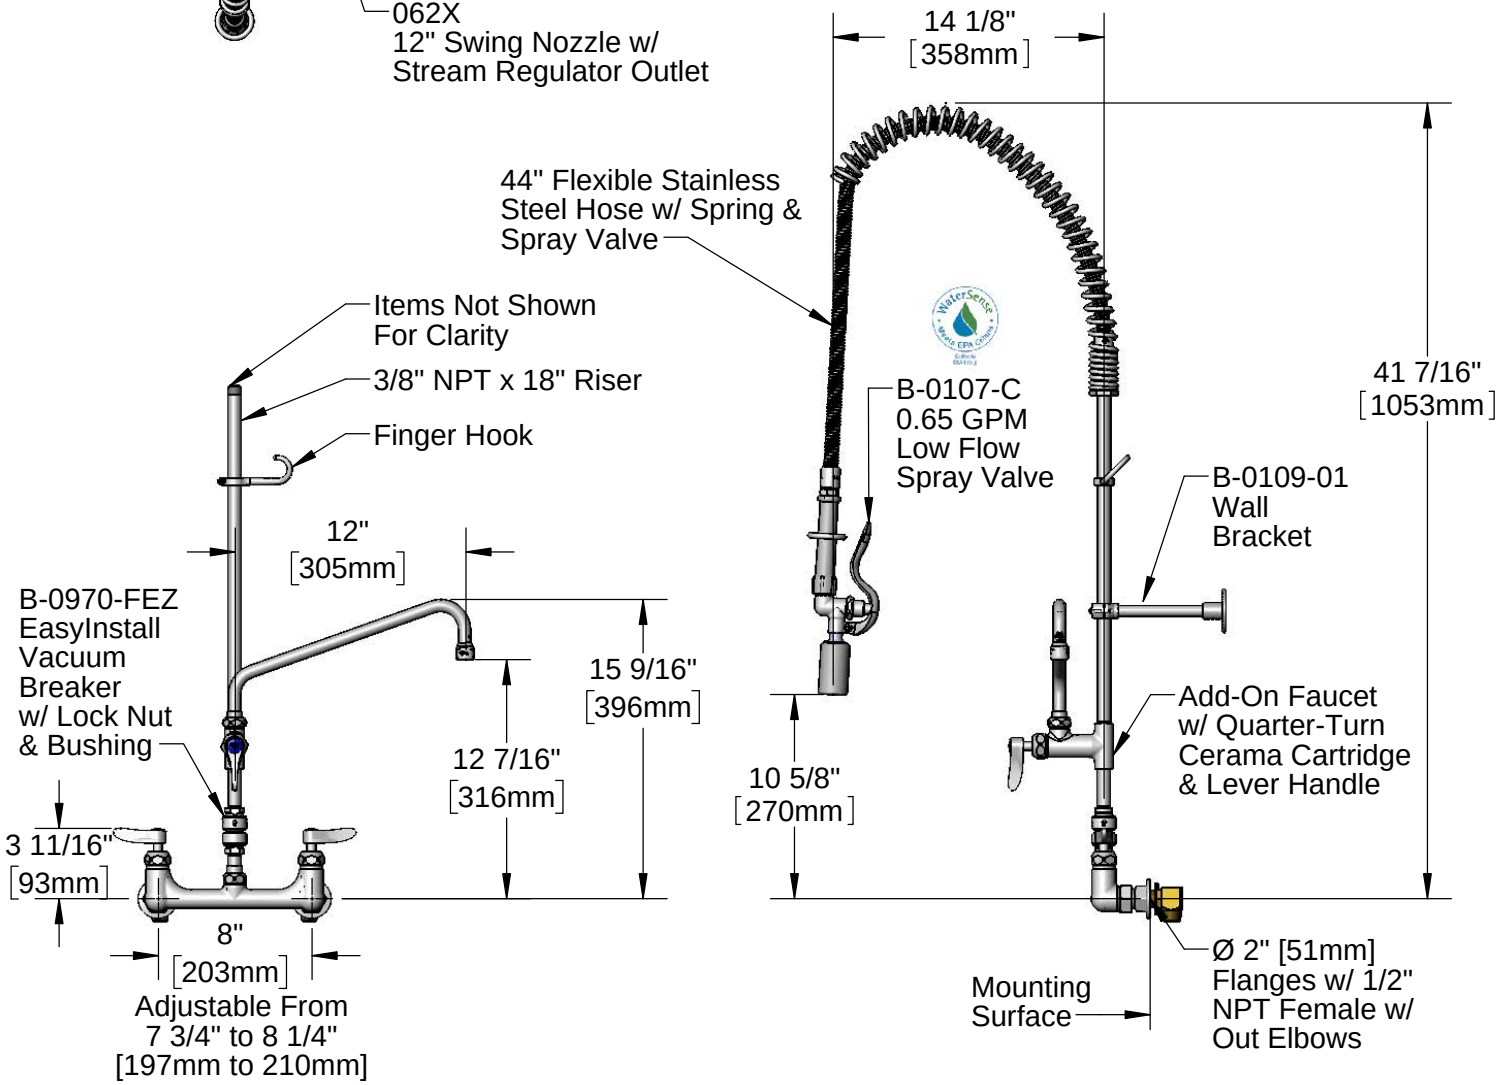
Product Specifications:

EasyInstall Pre-Rinse Unit: 8" Wall Mount Faucet, Short El w/ 1/2" NPT Female Inlets, 18" Riser, Vacuum Breaker, Add-On Faucet w/ 12" Swing Nozzle, 44" Flexible Stainless Steel Hose w/ 0.65 GPM Low Flow Spray Valve & 6" Wall Support

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
EPAct 2005 (PRSV)
CSA B64.8 (VB)
EPA WaterSense (PRSV)

| Drawn: | Checked: | Approved: | Date: | Scale: | Sheet: |
|---|---|---|---|---|---|
| MRC | JRM | JHB | 02/17/17 | 1:10 | 1 of 2 |

# T&S BRASS AND BRONZE WORKS, INC.


2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

Model No.

**B-2278-A12CRCEL**

Item No.

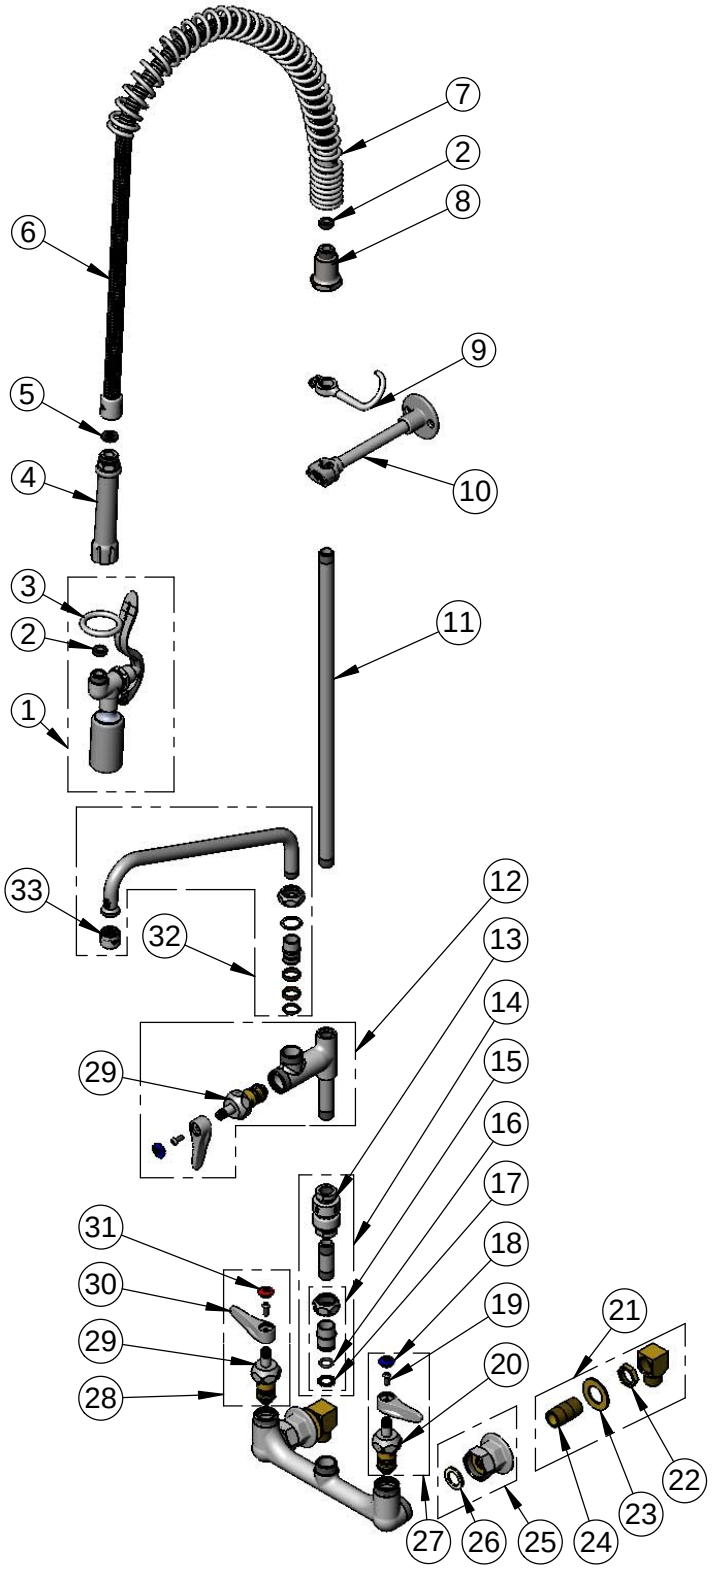


| ITEM NO. | SALES NO. | DESCRIPTION |
|---|---|---|
| 1 | B-0107-C | 0.65 GPM Low Flow Spray Valve |
| 2 | 010476-45 | #27 Washer |
| 3 | 000907-45 | Spray Valve Hold Down Ring |
| 4 | 002987-40 | Grip Handle |
| 5 | 001014-45 | Washer, B-0100 Hose Barrel |
| 6 | B-0044-H2A | 44" Flexible Stainless Steel Hose Assembly, Less Handle |
| 7 | 000888-45 | EasyInstall Overhead Spring |
| 8 | 000821-40 | Spring Body |
| 9 | 004R | Finger Hook |
| 10 | B-0109-01 | 6" Wall Bracket |
| 11 | 000369-40 | Nipple, 3/8" NPT x 18" |
| 12 | B-0155-CR-LN | Add-On Faucet w/ Quarter-Turn Cerama Cartridge & Lever Handle, Less Nozzle |
| 13 | B-0970-FE | 3/8" NPT Vacuum Breaker |
| 14 | B-0970-FEZ | EasyInstall Vacuum Breaker |
| 15 | EZ-K | EasyInstall 3/8" NPT x 2" Riser |
| 16 | 001065-45 | O-Ring |
| 17 | 014200-45 | Star Washer, Anti-Rotation |
| 18 | 018506-19NS | Blue Button Index, Press-in |
| 19 | 000925-45 | Lab Handle Screw |
| 20 | 012395-25NS | Quarter-Turn Cerama Cartridge w/ Check Valve, LTC |
| 21 | B-0230-K | Short Elbow Installation Kit |
| 22 | 002954-45 | Shank Lock Nut |
| 23 | 000999-45 | Brass Lock Washer |
| 24 | 013357-20 | 1/2" NPT x 1-5/8" Lg. Close Nipple |
| 25 | 00AA | 1/2" NPT Female Eccentric Flange |
| 26 | 001019-45 | Coupling Nut Washer |
| 27 | 012447-25NS | Quarter-Turn Cerama Cartridge w/ Check Valve, Handle, Blue Index & Screw, LTC |
| 28 | 012446-25NS | Quarter-Turn Cerama Cartridge w/ Check Valve, Handle, Red Index & Screw, RTC |
| 29 | 012394-25NS | Quarter-Turn Cerama Cartridge w/ Check Valve, RTC |
| 30 | 001638-45NS | Lever Handle (New Style) |
| 31 | 001193-19NS | Red Button Index, Press-in |
| 32 | 062X | 12" Swing Nozzle w/ Stream Regulator Outlet |
| 33 | B-PT | Full Flow Stream Regulator, 55/64-27 |

Product Specifications:

EasyInstall Pre-Rinse Unit: 8" Wall Mount Faucet, Short El w/ 1/2" NPT Female Inlets, 18" Riser, Vacuum Breaker, Add-On Faucet w/ 12" Swing Nozzle, 44" Flexible Stainless Steel Hose w/ 0.65 GPM Low Flow Spray Valve & 6" Wall Support

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
EPAct 2005 (PRSV)
CSA B64.8 (VB)
EPA WaterSense (PRSV)

| Drawn: | Checked: | Approved: | Date: | Scale: | Sheet: |
|---|---|---|---|---|---|
| MRC | JRM | JHB | 02/17/17 | NTS | 2 of 2 |

# Pre-Rinse Units

## B-2278-A12CRCEL


**TAG:** _____


EasyInstall *Pre-Rinse Unit*


**Architect/Engineering Specifications:**

8” wall mount mixing faucet with polished chrome plated brass body, continuous pressure vacuum breaker, add-on faucet with ceramic cartridge and lever handle, 12” swing nozzle with stream regulator outlet, 18” riser, 44” flexible stainless steel hose with heat resistant handle, 0.65 GPM low flow spray valve, ceramic cartridges with check valves, lever handles, 1/2" NPT female inlets, 1/2” NPT supply nipple kit, 6” adjustable wall bracket, spray valve holder and overhead spring. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and CSA B64.8. EPAct 2005 compliant.

Job Name_____
Model Specified_____Quantity_____
Variations Specified_____
Date_____

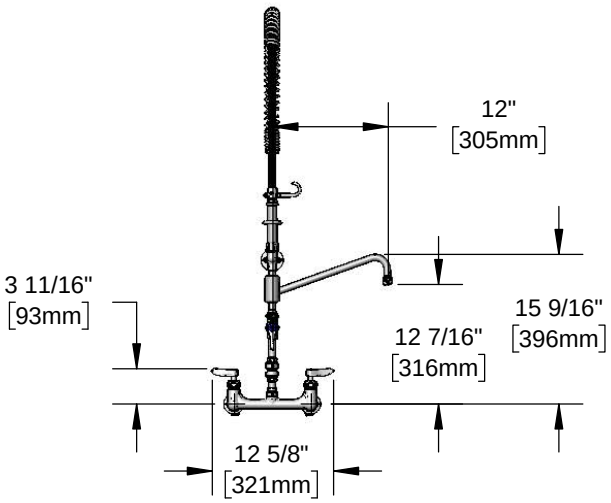

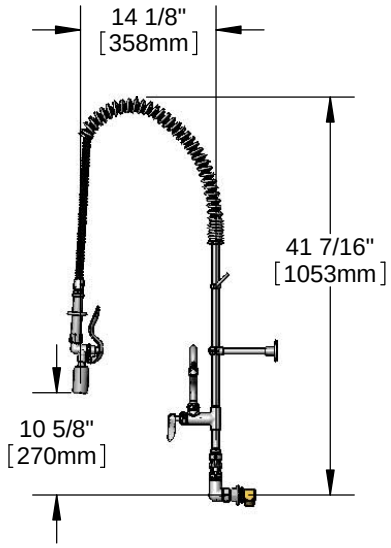**Features & Benefits:**

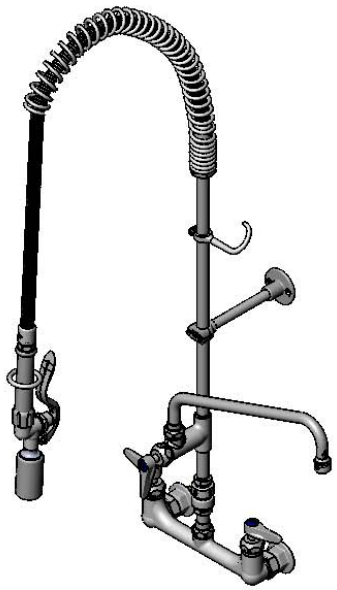- 8” wall mount mixing faucet w/ polished chrome plated brass body
- Add-on faucet w/ polished chrome plated brass body
- EasyInstall continuous pressure vacuum breaker for quick installation
- 12” swing nozzle w/ stream regulator outlet, Series 1
- 18” rigid riser
- 44” flexible stainless steel hose with heat resistant gray handle and hold down ring
- 0.65 GPM low flow spray valve
- Quarter-turn Cerama cartridges w/ check valves to prevent cross flow of water
- Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets with Ø 2" flanges
- Adjustable centers from 7 3/4" to 8 1/4“
- 1/2” NPT supply nipple kit
- 6” adjustable wall bracket
- Material: Polished chrome plated brass body, tubular nozzle, add-on faucet body, riser & spray valve body, chrome plated vacuum breaker, stainless steel hose and chrome plated metal handles

**Optional Add-On Faucet Outlets (Series 1 / VR Series 6)**

| GPM | Aerated | VR Aerated |
|---|---|---|
| 1.0 | ☐ B-0199-01-F10 | ☐ B-0199-06-F10 |
| 1.5 | ☐ B-0199-01-WS | ☐ B-0199-06-WS |
| 2.2 | ☐ B-0199-01 | ☐ B-0199-06 |

**Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- EPAct 2005 (PRSV)
- CSA B64.8 (VB)
- EPA WaterSense (PRSV)

**Warranty:** Three Year (Limited)

- Cerama Cartridge: Lifetime (Limited)

**Performance Data:**

- Pressure: 20 - 125 psi
- Temperature: 40˚F - 140˚F
- Flow Rate:
  Spray Valve: 0.65 GPM @ 60 psi
  Add-On Faucet: 5.35 GPM @ 60 psi

**Optional Cartridges With Checks**

☐ Quarter-Turn Cerama w/ Check Valve (Standard)
☐ Quarter-Turn Eterna w/ Spring Check

**Optional Pre-Rinse Spray Valves**

☐ B-0107 (1.42 GPM)
☐ B-0107-C (0.65 GPM) (Standard)
☐ B-0107-J (1.07 GPM)
☐ B-0108 (1.48 GPM)
☐ B-0108-C (0.65 GPM)

**Optional Handles**

☐ 4" Wrist Action
☐ Lever (Standard)
☐ 4-Arm

**T&S BRASS AND BRONZE WORKS, INC.**
• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 02/17/17