



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Countertop Glassdoor Merchandisers

Standard Features

- Black exterior cabinet with black door frame and white interior
- Environmentally friendly R600a refrigerant
- CTD-3/CTD-5 are forced air cooling and CTD-3S is cold wall cooling
- Foamed-in-place high density polyurethane insulation
- Double pane glass door with recessed door handle
- Door lock standard
- Mechanical controller
- Pre-installed removable PVC coated wire shelves standard
- Certified for packaged foods and bottled beverages
- Maintains temperatures between 35°F – 38°F
- Magnetic door gasket standard for positive door seal
- LED interior lighting
- Leveling legs
- 5' cord with NEMA 5-15 plug standard

For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

MODELS:

CTD-3 / CTD-3S / CTD-5



CTD-3



CTD-3S



CTD-5



3 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY



REV. 07/26



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,


New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Amps(A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Interior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
CTD-3	1	2.4	3	1.5	115/60/1	1/10	R600a	17 ¹ / ₄ × 19 ³ / ₄ × 27 ¹ / ₂	14 ³ / ₈ × 15 × 23	53	57
CTD-3S	1	2.4	3	1.5	115/60/1	1/8	R600a	18 ¹ / ₈ × 18 ¹ / ₂ × 33	14 ¹ / ₂ × 13 × 22	64	70
CTD-5	1	4.6	4	1.7	115/60/1	1/8	R600a	21 ¹ / ₄ × 22 × 33 ³ / ₄	18 × 17 × 29	88	95

PLAN VIEW


CTD-3

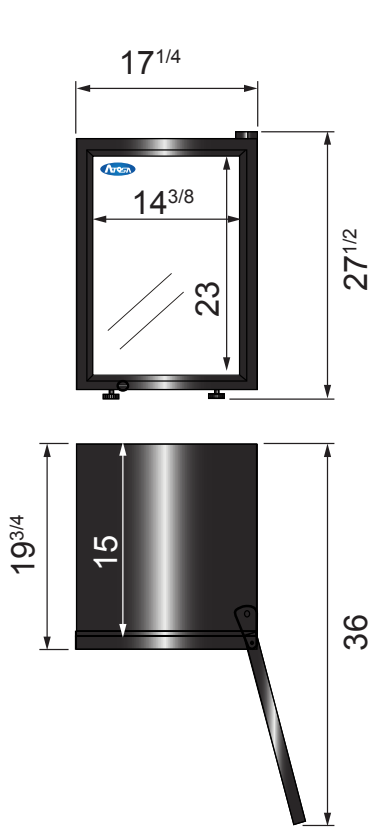

CTD-3S

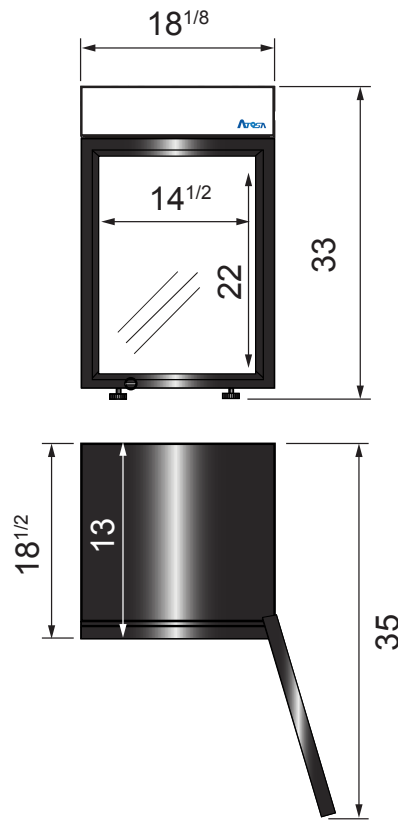

CTD-5

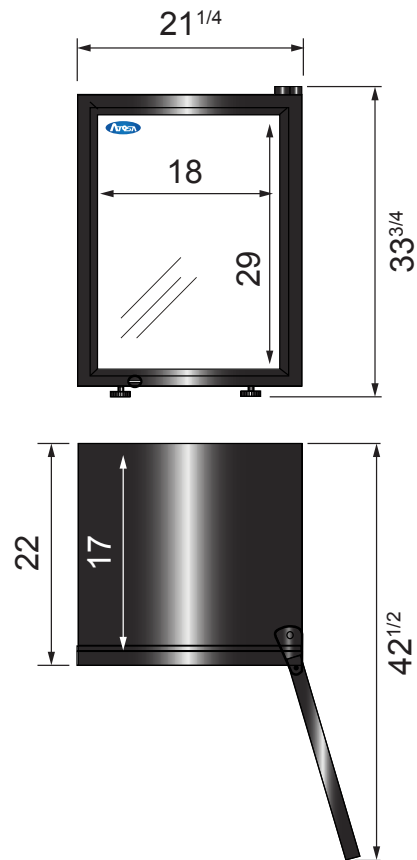

Door lock



LED lights



Epoxy shelves



NEMA 5-15P



NEMA
15A/125V