

SPEC SHEET

FWF10X18 (FREEZER WITH FLOOR)

External Dimensions: 9' 10" W x 18' 1" L x 7' 7" H

GENERAL SPECIFICATIONS

PANELS: 4" Thick foamed-in-place polyurethane insulation, cam-lock panels, tongue & groove design, 24 Ga. pre-painted white galvanized steel, CFC and HFC free materials, 10 year panel warranty and 1 year parts warranty,


FLOOR (IF APPLICABLE): 24 ga. pre-painted white galvanized steel, 600 lb/sq. ft. (foot traffic). Optional diamond plate recommended for hand-truck or pallet jack operation.

DOOR: 30"x77", 36"x77", 48"x77" door options, left or right hinged, self-closing, spring loaded hinge, flush-mounted, keyed locking door handle, 120V/1P/1A heater wire, pressure relief vent for freezers, 120V vapor proof light fixture provided loose (bulb not included).


APPROVALS: NSF/ANSI 7 Commercial Refrigerators and Freezers, UL723 Flame Spread and Smoke Development (Flame Spread Index 5, Smoke Developed Index 300), Department of Energy (DOE) Compliance and Certified, ASTM Test 518, ASTM Test E84

LAYOUT OPTIONS (Please select a layout)


☐ FWF10X18-36L




☐ FWF10X18-36L




☐ FWF10X18-36L




☐ FWF10X18-36L




☐ FWF10X18-36R




☐ FWF10X18-36R




☐ FWF10X18-36R




☐ FWF10X18-36R



☐ FWF10X18-30CR






☐ FWF10X18-36CR




DOOR OPTIONS (Please select a door)

Select door width:



Select left/right hinge:

☐ Left hinge



☐ Right hinge



ADDITIONAL OPTIONS

- | | |
|---|---|
| ☐ Kick Plate (Interior and Exterior) | ☐ Aluminum diamond plate for floor, 1/4" thick |
| ☐ 4 feet LED light (loose) | ☐ Exterior ramp |
| ☐ Aluminum diamond plate for floor, 1/8" thick | ☐ Rain roof membrane for outdoor application |

OPTIONAL REFRIGERATION SYSTEM (Please select a refrigeration type)

☐ Remote Refrigeration (Turbo Air)



Turbo air

1 x Turbo Air Outdoor Condensing Unit, 3.5 HP, Low Temp, Air Cooled, 208-230V/60Hz/1Ph, Copeland Scroll Compressor, R404A, R407C, R448A / R449A

1 x Turbo Air Evaporator, Electric Defrost, EC Motor, Pre-Assembled (R448A, R449A TXV, Solenoid Valve, Digital Temperature Controller), 4 Fans, 12,400 BTU, 208-230V/60Hz/1Ph

1 year parts warranty | Additional 4 years warranty available

☐ Top-Mount Refrigeration (Turbo Air)



Turbo air

2 x Turbo Air Indoor Package Unit, Top-Mount, Smart 7, Low Temp, 7,000 HP, 208-230V/60Hz/1Ph, R290

Blue Anti-corrosion-fin and Coated Copper Tube, Expansion Valve & Solenoid Valve, Hot Gas Defrost, Efficient Micro Channel Condenser Coil, Energy Efficient EC Motor

Hot Gas Condensate System (Panel Opening Size: 25" x 38.5")

1 year parts and labor warranty | Additional 4 years warranty available


OPTIONAL DISPLAY GLASS DOORS

☐ # of 24"x75" doors: _____

GENERAL SPECS:

Triple-pane for freezer, double pane for cooler
7 Wire Shelves
Black frame and shelves
Left hinge doors (field reversible)
LED lighting

Anthony
A DOWER COMPANY

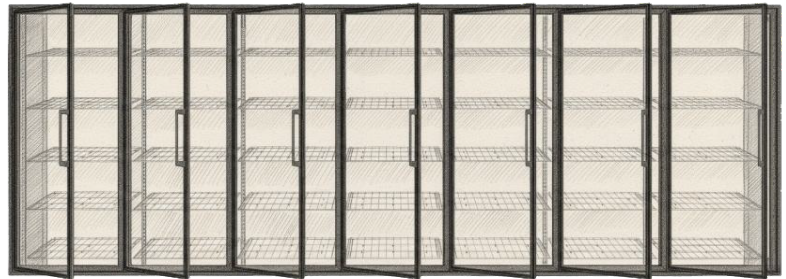

Net Opening Dimensions:

Set	Net Opening (Cooler or Freezer)	Electrical
5 Glass Door Set	124"x77.5"h	120V/60Hz/16A
4 Glass Door Set	99.5"x77.5"h	120V/60Hz/12A
3 Glass Door Set	75"x77.5"h	120V/60Hz/10A
2 Glass Door Set	50.5"x77.5"h	120V/60Hz/7A

CUSTOMER APPROVAL

Name: _____

Signature: _____

Date: _____



899 Newark Tpke, Kearny, NJ 07032
Tel: (908) 315-3222

www.GalaxyGroupCorp.com
Email: contact@GalaxyGroupCorp.com