

Coldline 27" Left-Hinged Solid Door Commercial Top Mount Reach-In Refrigerator



FEATURES

- Stainless steel interior and exterior
- Top-mounted compressor
- Refrigeration system keeps food at safe temperatures
- Self-closing doors with 90 degree stay-open feature
- Locks and keys included
- Adjustable heavy-duty PVC coated shelves
- U-shaped door handle
- Electronic control system
- Perforated rear plenum
- Preinstalled heavy-duty casters with brakes
- Removable installation board
- Interior LED lighting
- Hydro-Carbon R290 refrigerant

This Coldline stainless steel reach-in commercial refrigerator is perfect for restaurants, delis, bakeries, or cafes. It keeps your food products at safe temperatures.

- cETLus Listed
 - ETL Sanitation Listed
- Certified to NSF Standard



This unit requires a dedicated 15 Amp Circuit installed by a licensed electrician.

USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

TECHNICAL DATA

DIMENSIONS

Exterior Dimensions	26.75"W x 34.9"D x 82.2"H
Interior Dimensions	22.2"W x 27.6"D x 59.1"H
Packaging Dimensions	30"W x 36"D x 84.6"H
Net Volume	19 cu. ft.
Unit Weight	241 lb
Shipping Weight	309 lb.

ELECTRICAL

Voltage	115
Hertz	60
Phase	1
Amps	3
Plug Type	NEMA 5-15P

COOLING

Temperature Range	33°F to 41°F
Refrigerant	R290
Max. Ambient Temp	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5


CONSTRUCTION

Exterior Material	430 Stainless Steel
Interior Material	430 Stainless Steel
Insulation Material	Foamed-in-Place Polyurethane
Shelf Size	3 Qty: 21.5"W x 24.3"D
Shelf Material	Epoxy Coated Wire
Adjustable Shelf	Yes
Interior Light	Yes
Mobility Wheels/Casters	(4) Qty: 2 with brakes, 2 without

TECHNICAL DRAWING


MODEL: **C-1RL-TM**

MFR ITEM #:




NEMA 5-15P

FRONT VIEW

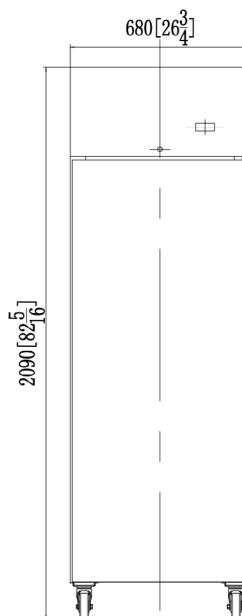

TOP VIEW

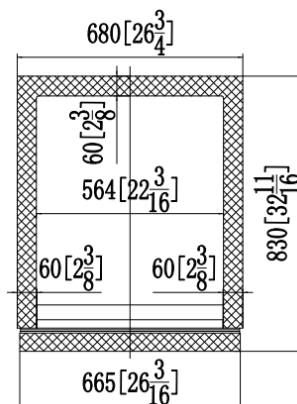

SIDE VIEW

