

Coldline D3-B 74" Three Glass Door Merchandiser Freezer with LED Lighting, Black



FEATURES

- 74" black swing glass door merchandiser freezer
- Double pane self-closing glass doors
- Easy to use digital temperature controls
- High-density polyurethane insulation preserves cold air
- Temperature range: -8-0 degrees F
- Brilliant LED lights
- Independent LED switch
- Ergonomic door handles
- Automatic defrost
- Magnetic door gasket
- 12 heavy-duty, adjustable PVC-coated shelves
- Pre-installed low-profile casters
- Bottom mounted refrigeration system
- 90" length power cord, NEMA 5-15P plug
- Hydro-Carbon R290 refrigerant



CE



This unit requires a dedicated 15 Amp Circuit installed by a licensed electrician.

USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

TECHNICAL DATA

DIMENSIONS

Exterior Dimensions	74.02"L x 28.35"D x 80.51"H
Interior Dimensions	69.29"L x 22.83"D x 60.8"H
Packaging Dimensions	76.38"L x 30.7"D x 83"H
Net Volume	50.48 cu. ft.
Unit Weight	551 lb.
Shipping Weight	628 lb.

ELECTRICAL

Voltage	110
Hertz	60
Phase	1
Amps	12
Plug Type	NEMA 5-15P
Power Cord Length	90"

COOLING

Temperature Range	-8°F to 0°F
Refrigerant	R290
Max. Ambient Temp	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	(2) 1/2

CONSTRUCTION

Exterior Material	Coated Steel
Exterior Color	Black
Interior Material	PCM
Insulation Material	Foamed-in-Place Polyurethane
Door Style	Swing
Door Type	Glass
Shelf Size	(8) 21.7"L x 20.35"D (4) 24.2"L x 20.35"D
Shelf Load Capacity	88 lb.
Shelf Material	Epoxy Coated Steel
Adjustable Shelf	Yes
Interior Light	(4) L.E.D
Mobility Wheels/Casters	(10) Pre-installed Casters




TECHNICAL DRAWING

MODEL: D3-B

MFR ITEM #:



NEMA 5-15P

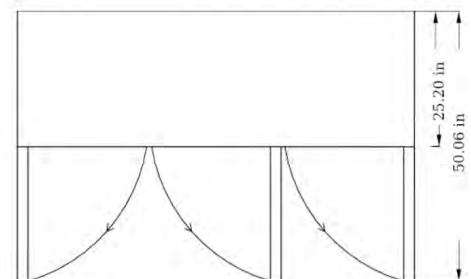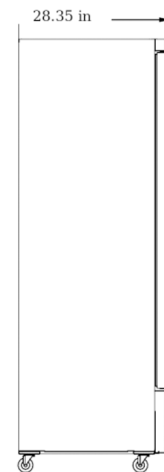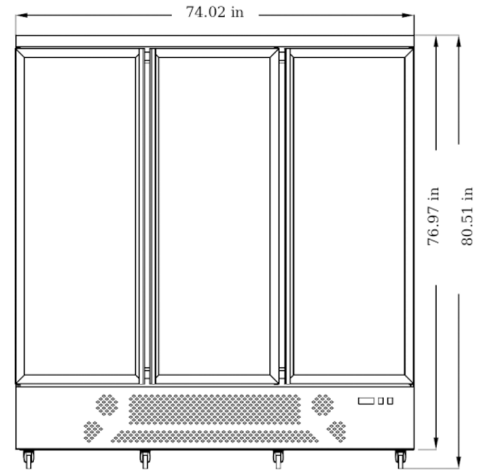

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

Coldline D4-B 98" Four Glass Door Merchandiser Freezer with LED Lighting, Black



FEATURES

- 98" black swing glass door merchandiser freezer
- Four Low-E double pane thermal insulated glass doors
- Easy to use digital temperature controls
- High-density polyurethane insulation preserves cold air
- Temperature range: -8 to 1 degrees F
- 5 vertical brilliant LED lights
- Independent LED switch
- Ergonomic door handles
- Magnetic door gasket
- Automatic defrost
- 16 heavy-duty, adjustable PVC-coated shelves
- 10 Pre-installed low-profile casters, 2 leveling feet
- Anti-fogging tempered self-closing glass doors
- Bottom mounted refrigeration system
- 90" length power cord, NEMA 5-15P plug



This unit requires a dedicated 15 Amp Circuit installed by a licensed electrician.

USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

TECHNICAL DATA

DIMENSIONS

Exterior Dimensions	98.43"L x 28.35"D x 80.51"H
Interior Dimensions	93.7"L x 22.8"D x 60.4"H
Packaging Dimensions	100.7"L x 30.7"D x 83"H
Net Volume	69 cu. ft.
Unit Weight	695 lb.
Shipping Weight	834 lb.

ELECTRICAL

Voltage	110
Hertz	60
Phase	1
Amps	10.7
Plug Type	NEMA 5-15P
Power Cord Length	90"

COOLING

Temperature Range	-8°F to 1°F
Refrigerant	R290
Max. Ambient Temp	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	(2) 3/4

CONSTRUCTION

Exterior Material	Coated Steel
Exterior Color	Black
Interior Material	Coated Steel
Insulation Material	Foamed-in-Place Polyurethane
Door Style	Swing
Door Type	Glass
Shelf Size	(8) 21.7"L x 20.35"D (8) 24.2"L x 20.35"D
Shelf Load Capacity	100 lb.
Shelf Material	Epoxy Coated Steel
Adjustable Shelf	Yes
Interior Light	(5) L.E.D
Mobility Wheels/Casters	10 Pre-installed Casters, 2 Leveling Feet

TECHNICAL DRAWING

MODEL: D4-B

MFR ITEM #:



NEMA 5-15P

