

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

Marchia MHS900 34" Open Heated Display Warming Case Grab and Go



FEATURES

- 34" reach-in heated display case
- Includes energy-saving night cover
- Easy to use digital temperature controller
- Brilliant internal LED illumination
- Stainless steel interior & exterior
- Durable, break-resistant glass sides for maximum product visibility
- Displays hot sandwiches, rotisserie chicken & more
- Large open front makes access easy
- Holds product up to average temperature of 158°F (70°C)
- Interior Dimensions: 32.87" x 21.06" x 51.2"
- 4 LED shelves with price tag strips
- Shelf size: 30.28" x 14.57"
- 4 pre-installed casters, 2 leveling feet

- cETLus Listed
 - ETL Sanitation Listed
- Conforms to UL & NSF Standards



This unit requires a dedicated 30 Amp Circuit installed by a licensed electrician.

USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

TECHNICAL DATA

DIMENSIONS

Exterior Dimensions	34"L x 29.4"D x 80"H
Interior Dimensions	32.87"L x 21.06"D x 51.18"H
Packaging Dimensions	39.4"L x 31.9"D x 81.2"H
Net Volume	19.8 cu. ft.
Unit Weight	344 lb.
Shipping Weight	384 lb.

ELECTRICAL

Voltage	220
Hertz	60
Wattage	3900
Phase	1
Amps	16.4
Power Cord Length	94"
Plug Type	NEMA 6-30P

HEATING

Temperature Range	Average Temperature: up to 158°F
Temperature Controller	Digital

CONSTRUCTION

Exterior Material	Glass and Stainless Steel
Exterior Finish	Stainless Steel
Shelf Quantity	4
Shelf Size	30.28"L x 14.57"D
Shelf Material	Stainless Steel
Interior Light	(5) L.E.D
Mobility Wheels/Casters	4 casters, 2 leveling feet


- Packaged food products must be pre-heated before placing in the case.
- Designed to operate in ambient conditions of 75°F with 55% relative humidity.

DIAGRAM

MODEL: MHS900

MFR MODEL:

FRONT VIEW

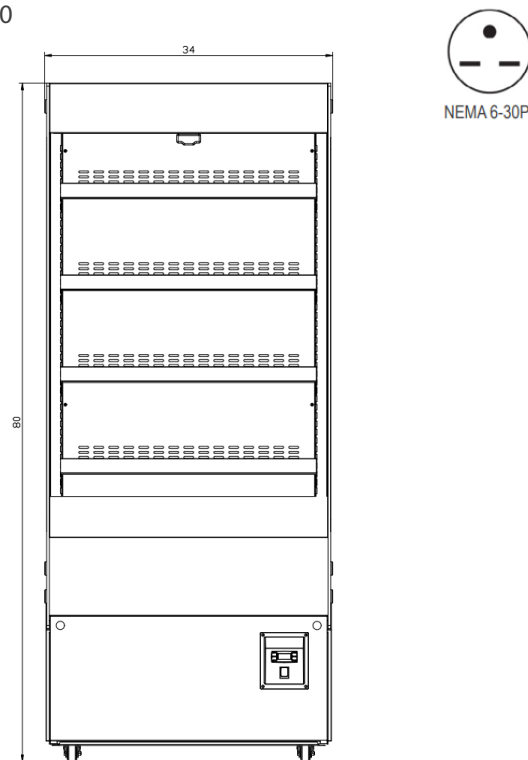

SIDE VIEW

