

FEATURES:

TMSLAG: Top is furnished with 1 5/8" square bend on sides and 1 5/8" sanitary rolled rim on front and rear & square sides.

TFMSLAG: Top is furnished with 1 5/8" square bend on sides and 1 5/8" sanitary rolled rim on front with 1 1/2" Rear Splash.

TKMSLAG: Top is furnished with 1 5/8" square bend on sides and 1 5/8" sanitary rolled rim on front with 5" Rear Splash.

Two hat-channels stud welded under tabletop to reinforce and maintain a level work surface.

CONSTRUCTION:

All TIG welded. Exposed weld areas polished to match adjacent surface.

Top is sound deadened.

Roll formed embossed galvanized hat channels are secured to top by means of structural adhesive and weld studs.

Gussets welded to support hat channels.

MATERIAL:

TOP: 16 gauge stainless steel type "304" series.

LEGS: 1 5/8" diameter tubular Stainless steel.
Stainless steel gussets. 1" adjustable stainless steel bullet feet.

Item #: _____ Qty #: _____

Model #: _____

Project #: _____



FLAT TOP
TMSLAG-X Series



Stainless Steel Bullet Feet
Standard On
TMSLAG, TFMSLAG
& TKMSLAG Series



1-1/2" BACKSPLASH
TFMSLAG-X Series



5" BACKSPLASH
TKMSLAG-X Series

		Model #	WT.	Cu. Ft.	Model #	WT.	Cu. Ft.
	L	FLAT TOP	1 1/2" SPLASH		5" SPLASH		
24" WIDE	24"	TMSLAG-242-X	TFMSLAG-242-X	36 lbs. 4	TKMSLAG-242-X	41 lbs. 6	
	30"	TMSLAG-240-X	TFMSLAG-240-X	42 lbs. 4	TKMSLAG-240-X	47 lbs. 6	
	36"	TMSLAG-243-X	TFMSLAG-243-X	47 lbs. 4	TKMSLAG-243-X	52 lbs. 6	
	48"	TMSLAG-244-X	TFMSLAG-244-X	56 lbs. 6	TKMSLAG-244-X	62 lbs. 8	
	60"	TMSLAG-245-X	TFMSLAG-245-X	64 lbs. 7	TKMSLAG-245-X	73 lbs. 10	
	72"	TMSLAG-246-X	TFMSLAG-246-X	77 lbs. 8	TKMSLAG-246-X	84 lbs. 12	
	84"	TMSLAG-247-X	TFMSLAG-247-X	86 lbs. 10	TKMSLAG-247-X	95 lbs. 14	
	96"	TMSLAG-248-X*	TFMSLAG-248-X*	102 lbs. 11	TKMSLAG-248-X*	112 lbs. 16	
30" WIDE	24"	TMSLAG-302-X	TFMSLAG-302-X	43 lbs. 5	TKMSLAG-302-X	47 lbs. 8	
	30"	TMSLAG-300-X	TFMSLAG-300-X	53 lbs. 5	TKMSLAG-300-X	55 lbs. 8	
	36"	TMSLAG-303-X	TFMSLAG-303-X	57 lbs. 5	TKMSLAG-303-X	62 lbs. 8	
	48"	TMSLAG-304-X	TFMSLAG-304-X	69 lbs. 7	TKMSLAG-304-X	75 lbs. 10	
	60"	TMSLAG-305-X	TFMSLAG-305-X	82 lbs. 8	TKMSLAG-305-X	89 lbs. 13	
	72"	TMSLAG-306-X	TFMSLAG-306-X	94 lbs. 10	TKMSLAG-306-X	101 lbs. 15	
	84"	TMSLAG-307-X	TFMSLAG-307-X	107 lbs. 12	TKMSLAG-307-X	115 lbs. 18	
	96"	TMSLAG-308-X*	TFMSLAG-308-X*	126 lbs. 13	TKMSLAG-308-X*	136 lbs. 20	
36" WIDE	36"	TMSLAG-363-X	TFMSLAG-303-X	75 lbs. 7	TKMSLAG-363-X	80 lbs. 10	
	48"	TMSLAG-364-X	TFMSLAG-304-X	85 lbs. 9	TKMSLAG-364-X	85 lbs. 14	
	60"	TMSLAG-365-X	TFMSLAG-305-X	96 lbs. 11	TKMSLAG-365-X	99 lbs. 17	
	72"	TMSLAG-366-X	TFMSLAG-306-X	108 lbs. 13	TKMSLAG-366-X	112 lbs. 20	
	96"	TMSLAG-368-X	TFMSLAG-308-X	140 lbs. 18	TKMSLAG-368-X	131 lbs. 23	

*All 8 ft. Tables Provided With 6 Legs


Customer Service Available To Assist You **1-800-645-3166** 8:30 am - 7:00 pm E.S.T.

DETAILS and SPECIFICATIONS


TOL $\pm .500"$

ALL DIMENSIONS ARE TYPICAL

TMSLAG SERIES - Flat Top

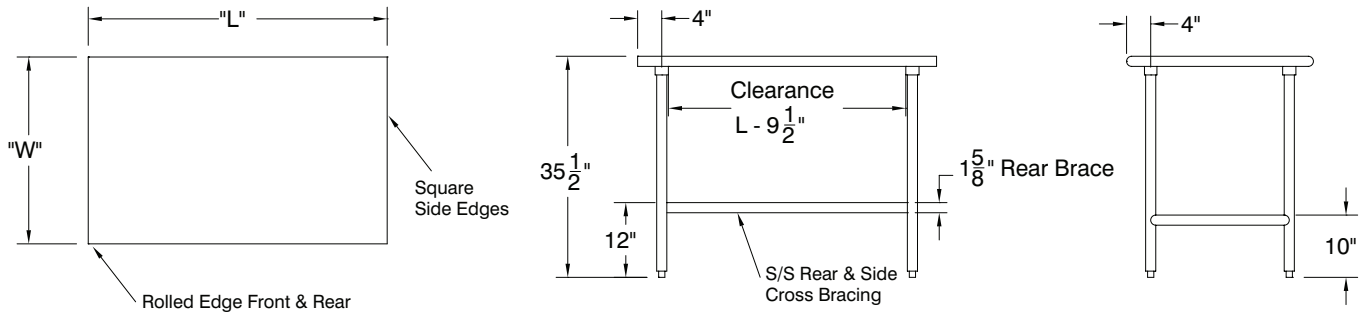

TFMSLAG SERIES - 1 1/2" Backsplash

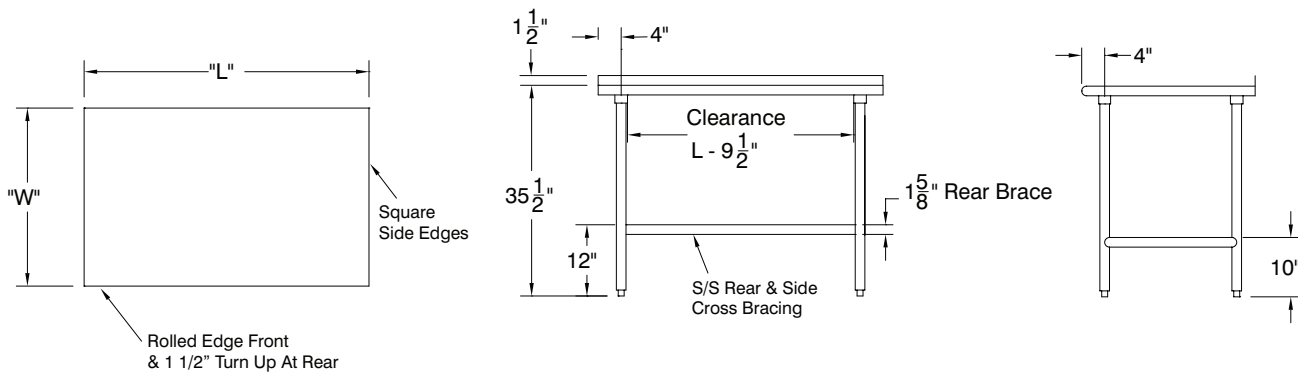

TKMSLAG SERIES - 5" Backsplash

